

Grip the Earth

BluEarth-Es ES32



SPEED RANGE

W/V/H/T

18 inch 17 inch 16 inch 15 inch 14 inch 13 inch



Pattern No.ES32

Simple and Powerful shoulder block design delivers reliable grip and excellent durability.




Optimised tread design adopted for each size width.



ES32 standard design WIDTH: 145-215 ES32A wide-design WIDTH: 225 and more

The all new Powerful and Comfortable Tread Design

Contact pressure homogenization and improvement of uneven wear.

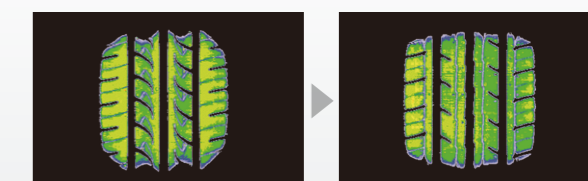

Current standard tire AE01 BluEarth-Es ES32

The all new Powerful and Comfortable Tread Design

Extra Powerful Profile

High rigidity and tough, Anti-uneven wear

Multiple Powerful Shoulder

Combination of deep lugs and sipes
Stability, Evacuation, Anti-uneven wear

5 Pitch Tread Pattern

Low pattern noise, Anti-uneven wear



Lightning Groove

High rigidity and proper edge volume
Safety, Drainage on Wet roads

Wide Straight Grooves

Anti-Hydro, Water draining on Wet braking
Straight driving and handling

BluEarth-Es ES32 Pattern No. ES32

Inch	Series	Dimensions	Pattern	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)
18	40	225/40R18 92W	❖	XL	637	7.5-9
		235/40R18 95W		XL	645	8-9.5
17	40	205/40R17 84V		XL	597	7-8
		215/40R17 87V		XL	605	7-8.5
	45	245/40R17 91V	❖		629	8-9.5
		205/45R17 84V			614	6.5-7.5
50	45	215/45R17 91V		XL	625	7-8
		225/45R17 94V	❖	XL	634	7-8.5
	55	235/45R17 97V	❖	XL	645	7.5-9
		215/50R17 95V		XL	646	6-7.5
16	45	225/50R17 94V	❖		658	6-8
		215/55R17 94V			666	6-7.5
	50	195/45R16 80V			581	6-7.5
		205/45R16 83V			589	6.5-7.5
55	50	195/50R16 84V			603	5.5-7
		205/50R16 87V			611	5.5-7.5
	60	185/55R16 83V			608	5-6.5
		195/55R16 87V			620	5.5-7
65	55	205/55R16 91H			633	5.5-7.5
		205/55R16 91V			631	5.5-7.5
		215/55R16 93H			647	6-7.5
		215/55R16 97V		XL	645	6-7.5
	60	225/55R16 95V	❖		656	6-8
		175/60R16 82H			616	5-6
		195/60R16 89H			641	5.5-7
		205/60R16 92H			652	5.5-7.5
70	215/60R16 95H			665	6-7.5	
	215/60R16 99H		XL	664	6-7.5	
	215/60R16 99V		XL	664	6-7.5	
	225/60R16 98V	❖		676	6-8	
65	55	205/65R16 95H			672	5.5-7.5
		175/50R15 75H			556	5-6
	55	195/50R15 82V			577	5.5-7
		175/55R15 77V			571	5-6
70	55	185/55R15 82H			584	5-6.5
		185/55R15 82V			583	5-6.5
	65	195/55R15 85H			594	5.5-7
		195/55R15 85V			593	5.5-7

Inch	Series	Dimensions	Pattern	RF/XL	Overall Diameter (mm)	Approved Rim Width (inch)
15	60	155/60R15 74H			567	4.5-5.5
		165/60R15 77H			579	4.5-6
		175/60R15 81H			591	5-6
		185/60R15 84H			603	5-6.5
		185/60R15 88H		XL	604	5-6.5
	65	195/60R15 88H			615	5.5-7
		205/60R15 91H			627	5.5-7.5
		145/65R15 72H			569	4-5
		175/65R15 84H			609	5-6
		185/65R15 88H			619	5-6.5
14	55	185/65R15 88T			619	5-6.5
		195/65R15 91H			633	5.5-7
		195/65R15 91T			632	5.5-7
		195/65R15 91V			633	5.5-7
		195/65R15 95V		XL	631	5.5-7
	60	205/65R15 94H			646	5.5-7.5
		205/65R15 99H		XL	647	5.5-7.5
		165/55R14 72H			538	4.5-6
		165/60R14 75T			554	4.5-6
		185/60R14 82H			578	5-6.5
65	55	195/60R14 86H			589	5.5-7
		155/65R14 75T			558	4.5-5.5
		165/65R14 79T			570	4.5-6
		175/65R14 82H			584	5-6
		175/65R14 82T			584	5-6
	70	185/65R14 86H			596	5-6.5
		185/65R14 86T			596	5-6.5
		195/65R14 89H			609	5.5-7
		165/70R14 81T			589	4-5.5
		165/70R14 85T		XL	588	4-5.5
13	70	175/70R14 84H			601	4.5-6
		175/70R14 84T			601	4.5-6
		185/70R14 88H			618	4.5-6
		185/70R14 88T			618	4.5-6
70	13	195/70R14 91H			631	5-6.5
		175/70R13 82T			576	4.5-6

XL = Extra Load ❖ = ES32A Available size